


# HERE'S HOW TO MEASURE:

Measure from sill to head (vertically) in three locations and from jamb to jamb (horizontally) in three locations to the nearest sixteenth of an inch (see Figure A). This measurement will give the nominal window opening if a panel is to be installed.



Measure the actual glass surface between the moldings both vertically and horizontally (see Figure B). Note whether the width of the molding that shows inside the sill (i.e. how far it extends towards the center of the opening - see Figure B) is the same all the way around the window. This will help me to ensure that the molding doesn't cast a shadow on the stained glass window.

Measure the depth of the sill up to the molding (see Figures C and D).

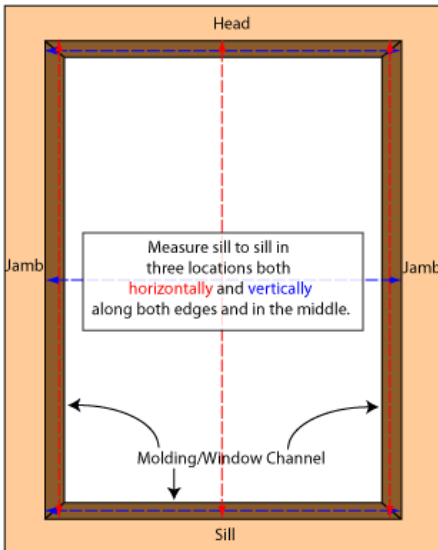

### Your Sill-to-Sill Window Measurements

Horizontal:

Top: \_\_\_\_\_

Middle: \_\_\_\_\_

Bottom: \_\_\_\_\_


Vertical:

Left: \_\_\_\_\_

Center: \_\_\_\_\_

Right: \_\_\_\_\_

Figure A

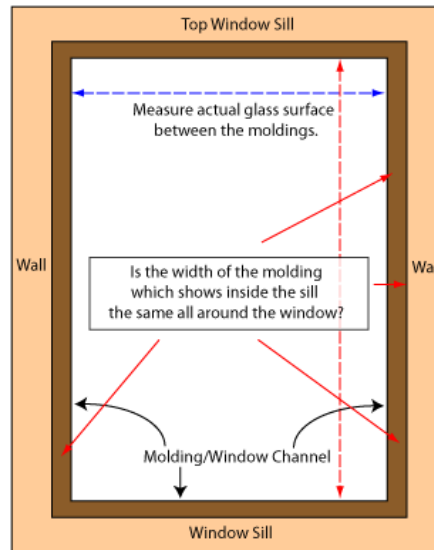

### Your Glass Surface Window Measurements

Horizontal:

Top: \_\_\_\_\_

Middle: \_\_\_\_\_

Bottom: \_\_\_\_\_

Vertical:

Left: \_\_\_\_\_

Center: \_\_\_\_\_

Right: \_\_\_\_\_

Width of molding:

Left: \_\_\_\_\_

Right: \_\_\_\_\_

Top: \_\_\_\_\_

Bottom: \_\_\_\_\_

Figure B

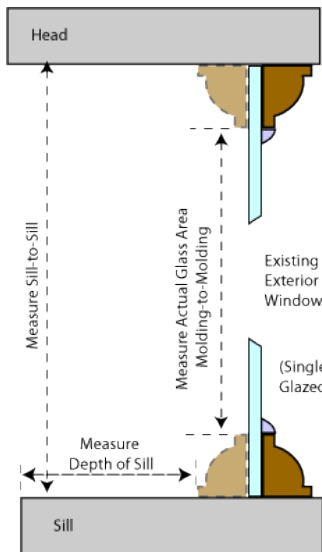


Figure C  
Single Glazed  
Exterior Window

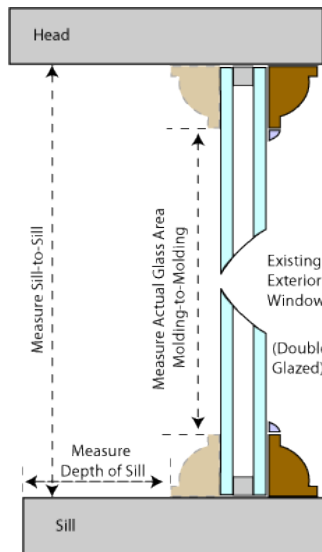


Figure D  
Double Glazed  
Exterior Window

### Your Sill Depth

\_\_\_\_\_